





GACHE ELECTRIQUE ROUREG™ MINI CF
 ELECTRIC STRIKE ROUREG™ MINI CF
 ROUREG™ ELEKTRO-TÜRÖFFNER MINI CF
 ROUREG™ DEUROPENER MINI CF

SEM1CRCF

ST_SEM1CRCF_A_091201

● de série / standard execution / Standardausführung / standard uitvoering
 — non disponible / not available / nicht verfügbar / niet beschikbaar

RACCORDEMENT
 CONNECTING
 ANSCHLUßPLAN
 AANSLUITING

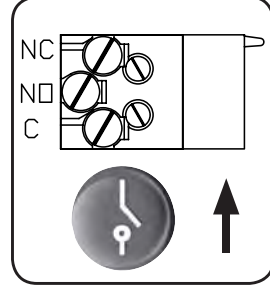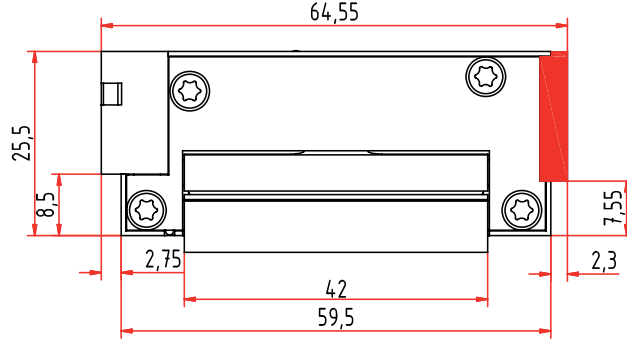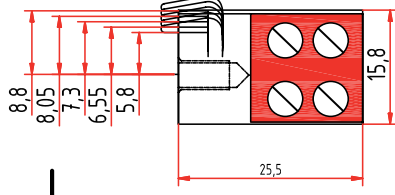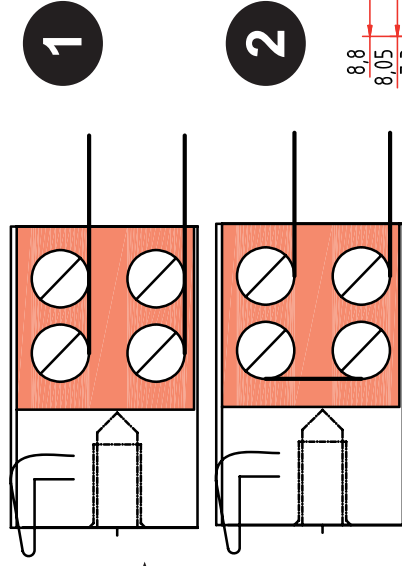

mm	kg	°C	DaN	CE	mm
h x l x p H x L x D H x B x T H x B x D	0,1 kg	1000° C	800 DaN		
1 ROUREG MINI ROUGE RED ROT ROOD	A EMISSION - FAIL SECURE - ARBEITSSTROM - ARBEIDSSSTROOM adapté aux portes coupe-feu / adapted for fire-doors Feuerschutztüröffner / geschikt voor branddeuren				
MODELE MODEL MODELL					
SEM1CRCF	—	1	10,2 - 13,8 V DC	200 mA	1
		1	12 - 24 V AC	200 - 400 mA	1
		2	20,4 - 27,6 V DC	100 mA	2
		2	24 - 48 V AC	100 - 200 mA	2
DEVERROILLAGE IMMEDIATE SOUS PRESSION JUSQU'A : IMMEDIATE UNLOCKING UNDER LOAD UP TO : TÜRÖFFNUNG BEI EINER LAST VON BIS ZU: ONTGREDELING ONDER DRUK VAN :					
			DC = 6 DaN	AC = 16 DaN	



13b rue Saint-Exupéry CS20152 F-67503 HAGUENAU CEDEX ☎ +33 (0)3 90 59 02 20 📠 +33 (0)3 90 59 02 19
 Sous réserve de modifications techniques - Technical changes reserved! - Änderungen vorbehalten!

