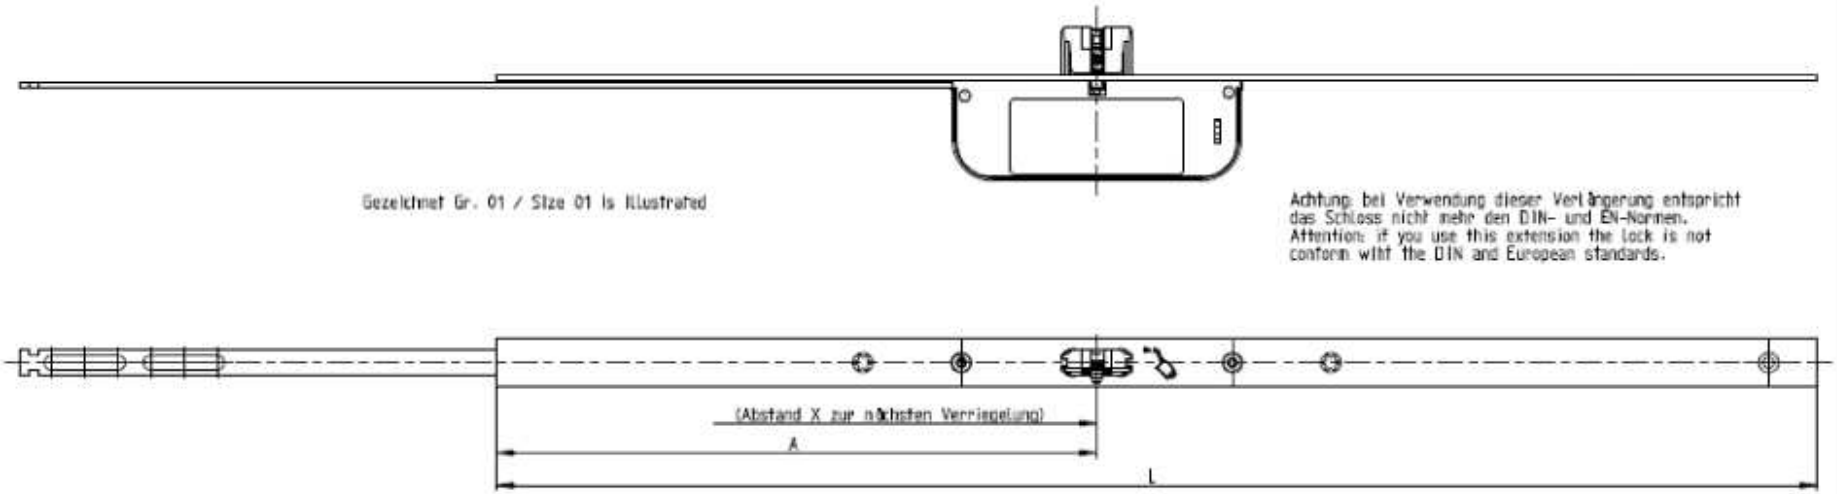

63474006000	—	G29294	634.489	896.854	250	550	94148114000	94339803000	N	470	Stulp 24x3	
63474005000	—	G28148	643.790	950.652	250	550	94148103000	94339803000	N	470	U-Stulp 24x6x2.5	
63474004000	—	G27401	541.273	845.701	250	550	94148102000	94339803000	N	470	Stulp 20	
63474003000	—	G21758	663.096	985.017	142	524.5	94148112000	94339804000	N	677	U-Stulp 24x6x2.5	
63474002000	—	G21758	888.605	1237.381	532	914.5	94148111000	94339802000	Y	677	U-Stulp 24x6x2.5	
63474001000	—	G21473	498.098	801.501	250	550	94148101000	94339803000	N	470	Stulp 16	
NUMBER	SAP_INDEX	CHANGE_NO	MASS	SURFACE	A	L	STULP	ZUGSTANGE	FUEHRUNG_U-STULP	ABSTAND X	BENENNUNG	BEMERKUNG

ORD.	REG.
3/32a	40
--	--
--	--
--	--
--	--
S.U	
BKS	
--	
--	

Remark
Montageanleitung siehe 0-44965

Tolerance WN 0531	Material — Profile —			Standard --			Mass (g) —	Surface (cm²) --	
Scale 1:2	Revision 6	Iteration 3		Level	Released		Surface treatment —		
Date 07.07.2016	Change No 529294	First Release 521473	Stg. 08	Ver.	—	Db	Thermic treatment —		
Gr. 06 neu hinzu. --				Draft	01.07.2008	DL	Pr-Gr L0	Part-No. 32944	
							Replacement for —	Safety characteristics 0	
							Drawing No. 6-34740-99-0-00	Sheet 1/1	Size 3

GU

Description
Stulpverlängerung mit Fallenriegel
—
Forent extension with latchbolt

TRENOIS DECAMPS

Proprietary rights apply in accordance with ISO 16016.

V7