




DRYWALL SCREW: FINE PITCH

Phillips

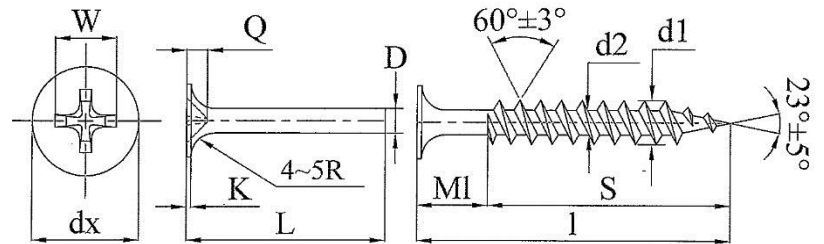

Specifications

Material: Steel
Coating: Phosphated



CE Certified and tested according to EN14566

SIZE: (mm)	dx:	D	K	Ø	R	W	d1	d2
3.5	8.10 ~ 8.50	2.63 ~ 2.67	0.5 ~ 0.8	2.70 ~ 3.20	4 ~ 5	PHIL #2	3.35 ~ 3.53	2.12 ~ 2.28
3.9	8.10 ~ 8.50	2.93 ~ 2.97	0.5 ~ 0.8	2.70 ~ 3.20	4 ~ 5	PHIL #2	3.70 ~ 4.00	2.40 ~ 2.55
4.2	8.10 ~ 8.50	3.18 ~ 3.22	0.5 ~ 0.8	2.70 ~ 3.20	4 ~ 5	PHIL #2	4.00 ~ 4.30	2.80 ~ 3.00
4.8	9.30 ~ 10.00	3.78 ~ 3.82	0.5 ~ 0.8	2.87 ~ 3.30	4 ~ 5	PHIL #2	4.75 ~ 4.95	3.22 ~ 3.42

Length (mm)	l (mm)	L (mm)				MI
		Diameter				
		3.5	3.9	4.2	4.8	
25	24.20 ~ 25.80	22.20 ~ 22.30	22.20 ~ 22.30			4.40 ~ 5.60
30	29.20 ~ 30.80		26.80 ~ 26.90			4.40 ~ 5.60
35	33.73 ~ 36.27	31.80 ~ 31.90	31.80 ~ 31.90			4.40 ~ 5.60
45	43.73 ~ 46.27	41.50 ~ 41.60	41.50 ~ 41.60			4.40 ~ 5.60
55	53.73 ~ 56.27	51.80 ~ 51.90	51.80 ~ 51.90			6.13 ~ 7.33
65	64.00 ~ 66.00			62.50 ~ 62.60		6.13 ~ 7.33
70	69.00 ~ 71.00			66.30 ~ 66.40		6.13 ~ 7.33
75	74.00 ~ 76.00			72.30 ~ 72.40		6.13 ~ 7.33
80	79.00 ~ 81.00			76.60 ~ 76.70	76.60 ~ 76.70	28.20 ~ 29.20
85	84.00 ~ 86.00			81.60 ~ 81.70		33.20 ~ 34.20
90	89.00 ~ 91.00				86.60 ~ 86.70	38.20 ~ 39.20
110	109.00 ~ 111.00				106.60 ~ 106.70	58.20 ~ 59.20
130	129.00 ~ 131.00				126.60 ~ 126.70	78.20 ~ 79.20

1. Surface hardness: HV 550~ 720
2. Core hardness standard: HV 400~ 450
3. Torque test: 3.5 (MIN.28 kgf-cm); 3.9 (MIN.38 kgf-cm); 4.2 (MIN.45 kgf-cm); 4.8 (MIN.56 kgf-cm)
4. Case depth standard: 3.5, 4.2 & 4.8 (0.10~ 0.23mm)
5. Penetration:
 - 3.5, 3.9 (Max 0.8 Sec)
 - 4.2 (Max 1.5 Sec)
 - 0.70 mm steel plate
 - Condition: 30 Pounds static weight & 2500 RPM
6. Salt-spray test: 48 hours

These are our recommended guidelines only

Visitors

Den Engelsman 18
 6026 RB Maarheeze
 The Netherlands

Postal address

P.O. Box 2670
 6026 ZH Maarheeze
 The Netherlands

Contact

+31(0)495 599 888
 info@stafa.nl
 stafa.nl

IBAN: NL63 ABNA 0444 6696 39

BIC: ABNANL2A

VAT: NL800966041B01

CoC: 17075593